



Laminate Wood - Carpet Tile - Vinyl Tile



LAMINATE WOOD CATALOG



Laminate Wood

8mm HDF Laminate 121.5cm x 19.6cm

8 Pieces / Box

1.895m²/ Box

14.40Kg / Box



Available Colors



KN 3501 "NATURAL WOOD"



KN 3508 "GREIGE WOOD"



99165-9 "HICKORY"



99165-5 "BEACHWOOD"



99191-7 "PECAN"

Laminate Wood

HDF MOULDINGS & UNDERLAYMENT for LAMINATE 8mm
Available in all 3 Laminate Colors



SKIRTING 80
240cm*8cm*1.5cm



STAIR BOARD
MOULDING
240cm*11.5cm*2.4cm



T MOULDING
240cm*4.5cm*1.1cm




OYE3-A
3mm SILVER FOAM

Moisture Barrier and Backing

18.6m²/ Roll






CARPET TILE CATALOG

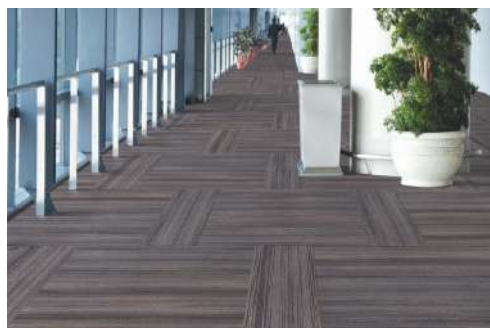

Carpet Tile Alfombra Modular

Invincible 851 Nylon Carpet Tile



Fiber System

Solution Dyed Nylon

Pile Weight

18 oz/SY 610 g/m²

Gauge

1/12th 2.1 mm

Density

5500

Size & Packaging

Tile Size
19.7" x 19.7" (50 cm x 50 cm)

Carton
20 tiles per carton = 6 SY = 5 m²
32 cartons per pallet

Sustainability

- CRI Green Label Plus
- 100% PVC-Free
- Up to 20% pre-consumer recycled content

European Spec Backing

PVC-Free, Four-Layers:

1. Non-Woven Primary Layer
- Strong Edges
2. Advanced Polymer Pre-Coat
- Superior Tuft Lock
3. Modified Bitumen Core
- Stability in Heavy Traffic
4. Polyester Felt Back
- Reliable Adhesion


Testing

Flammability Class I (ASTM E648)
Static <2 kV (AATCC 134)

Warranties

Lifetime Stain Resistance
Lifetime Backing Performance
Lifetime Commercial Wear

Installation Methods



Sample SKUS

Handle Boards
HB851NF
10 per carton (77 lbs)

Folders
2P851NF
20 per carton (45 lbs)

Producto Sobre Pedido excepto *



Carpet Tile Alfombra Modular

Intuition 845 Poly Carpet Tile



Fibre System
Nextron Solution Dyed
Twisted Polypropylene

Pile Weight
18 oz/SY 610 g/m²

Gauge
1/12th 2.1 mm

Density
5500



Format
Tile Size: 19.7" x 19.7" 50 cm x 50 cm
Carton: 20 tiles = 6 SY = 5 m²
Pallet: 32 cartons

- PVC-Free Backing
1. Non-Woven Primary Layer
- Strong Edges
 2. Advanced Polymer Pre-Coat
- Superior Tuft Lock
 3. Modified Bitumen Core
- Stability in Heavy Traffic
 4. Polyester Felt Back
- Reliable Adhesion

Testing
Flammability Class I (ASTM E648)
Air Quality Certified Green Label Plus

- Lifetime Commercial Warranties
- Comprehensive Stain (No Exclusions)
 - Backing Performance
 - Commercial Wear

Installation Methods



Sample SKUS
Handle Boards
HB845MX
10 boards per carton

Folders
2P845MX
20 folders per carton

Producto Sobre Pedido



Carpet Tile Alfombra Modular

Framework 879 Poly Carpet Tile



879 011
Sand Dune




879 012
Chestnut



879 008
Aluminium



879 013
Battleship



879 014
Graphite



879 002
Steel Blue

Fibre System
100% BCF Solution Dyed Polypropylene

Gauge
1/12th 2.1 mm

Density
5000

Format
Tile Size: 19.7" x 19.7" 50 cm x 50 cm
Carton: 20 tiles = 6 SY = 5 m²
Pallet: 32 cartons

- PVC-Free Backing**
1. Non-Woven Primary Layer
- Strong Edges
 2. Advanced Polymer Pre-Coat
- Superior Tuft Lock
 3. Modified Bitumen Core
- Stability in Heavy Traffic
 4. Polyester Felt Back
- Reliable Adhesion

Testing

Flammability	Class I (ASTM E648)
Static	<2 kV (AATCC 134)
Air Quality Certified	Green Label Plus

- Lifetime Commercial Warranties**
- Comprehensive Stain (No Exclusions)
 - Backing Performance
 - Commercial Wear

Installation Methods



Quarter-Turn

Sample SKUS
Handle Boards
HB879MX
10 boards per carton

Folders
2P879MX
20 folders per carton

Producto Sobre Pedido



VINYL TILE CATALOG



Divani 



Vinyl Tile

Piso Vinilico

Coastal Resort 439 Heavy Commercial Traffic



439 051
Mineral White Maple



439 026
Dovetail Gray



439 005
Aged Driftwood



439 002
Light Twine



439 043
Salted Caramel



439 011
Shaded Walnut

Size

7.25" x 48" x 2.5 mm

Wear Layer

20 mil / UV-Cured Urethane

Embossing

Real Touch™ Embossed in Register

Edge Treatment

Beveled

Installation

Full Spread Adhesive

Packaging

17 pieces per carton (40 lbs)
41.1 SF per carton
55 cartons per pallet
20 pallets per container

Testing

Critical Radiant Flux
Surface Flammability
Coefficient of Friction
Static Load Limit
Sound Transmission Class (STC)
Impact Isolation Class (IIC)
High Frequency Impact Isolation Class (HIIC)
Floor Score Certified
Phthalate Free
100% Virgin PVC

ASTM E648 Class I
DOC FF 1-70 Passed
ASTM 2047 Passes > 0.6
ASTM F970 1300 lbs
ASTM E492 64
ASTM E989 69
ASTM E322 89

Product Classification

ASTM F1700 Class III, Type B

Warranties

Lifetime Waterproof
Lifetime Residential Wear
25-Year Commercial Wear



Sample SKUs

Handle Boards

HB439NF
*Includes Bandwidth Carpet
10 per carton (85 lbs)

Strap Sets

SS439NF
5 per carton (19 lbs)

Folders

3P439NF
*Includes Bandwidth Carpet
20 per carton (56 lbs)

Producto Sobre Pedido



Vinyl Tile

Piso Vinilico

Groundwork 423 & Bedrock 424 Commercial Traffic



423 064
Belgian Linen



423 402
Pearl Oak



423 801
Natural Oak



423 808
Pewter Oak



423 412
Tavern Oak



423 308
Settlement Pine



424 001
Whitewash



424 505
Sterling Limestone



423 824
Restoration Multi-strip (Planks Vary)



423 204
Estate Oak

Size

Plank	7.25" x 48"
	2 mm thick
Tile	12" x 24"
	2 mm thick

Wear Layer

12 mil / UV-Cured Urethane

Edge Treatment

Square Edge

Installation

Full Spread Adhesive

Product Classification

ASTM F1700 Class III, Type B

Packaging

Plank	21 pieces per carton (45 lbs)
	50.8 SF per carton
	55 cartons per pallet
	20 pallets per container
Tile	27 pieces per carton (45 lbs)
	54 SF per carton
	54 cartons per pallet
	20 pallets per container

Testing

Critical Radiant Flux	ASTM E648
Surface Flammability	DOC FF 1-70
Coefficient of Friction	ASTM D2047
Static Load Limit	ASTM F970
Floor Score Certified	
Phthalate Free	
100% Virgin PVC	



Class 1
Passed
Passes > 0.6
1300 lbs

Sample SKUs

Handle Boards
HB424NF-B
10 per carton (80 lbs)

Strap Sets
SS424NF-B
5 per carton (20 lbs)

Folders
FP424NF-B
20 per carton (64 lbs)

Warranties

20-Year Waterproof
20-Year Residential Wear
10-Year Commercial Wear

Producto Sobre Pedido



Vinyl Tile

Piso Vinilico

Medalist 453 Commercial Traffic



453 563
Driftwood Oak

453 442
Daylight Oak

453 430
Linen Oak

453 443
Summer Truffle Oak

453 558
Arrowhead Oak

453 223
Tree Swing Oak

Size

7.25" x 48" nominal

Wear Layer

12 mil / UV-Cured Urethane

Installation

Full Spread Adhesive

Product Classification

ASTM F1700 Class III, Type B

Packaging

28 pieces per carton (39 lbs)
67.7 SF per carton
55 cartons per pallet
20 pallets per 20ft container

Testing

Critical Radiant Flux
Surface Flammability
Coefficient of Friction
Static Load Limit
Floor Score Certified
Phthalate Free
100% Virgin PVC

ASTM E648
DOC FF 1-70
ASTM 2047
ASTM F970



Class I
Passed
Passed >0.6
1300 lbs

Sample SKUs

Handle Board
HB453NF
5 per carton (71 lbs)

Strap Sets
SS453NF
5 per carton (55 lbs)

Folder
2P453NF
20 per carton (110 lbs)

Warranties

20-Year Waterproof
20-Year Residential Wear
10-Year Commercial Wear

Producto Sobre Pedido



LVT FLOOR CATALOG

VINYL TILE




Castel[®]
azulejos • baños • cabinas




LVT Floor

Piso Vinilico

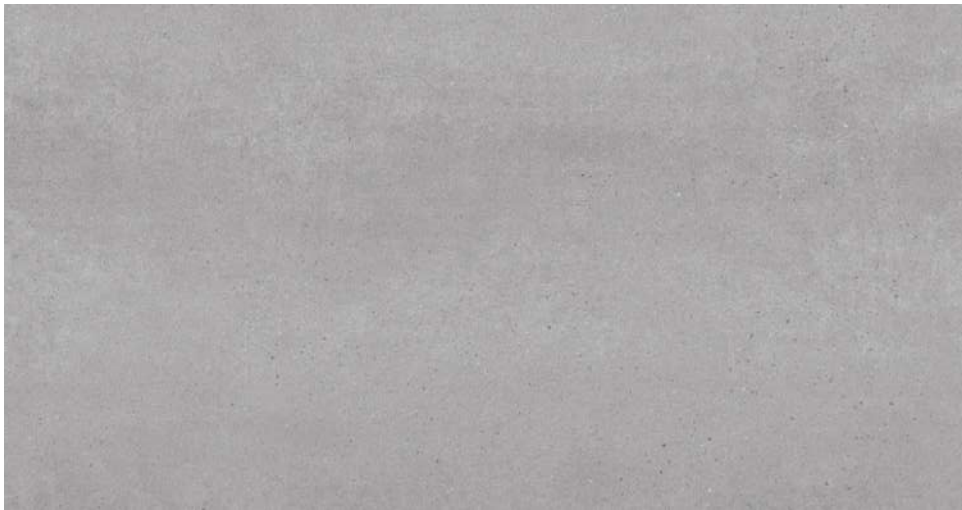

Concrete Oxford
91.4 x 45 x 3.3 cm
5.01 m² p/caja

LVT Floor Piso Vinilico

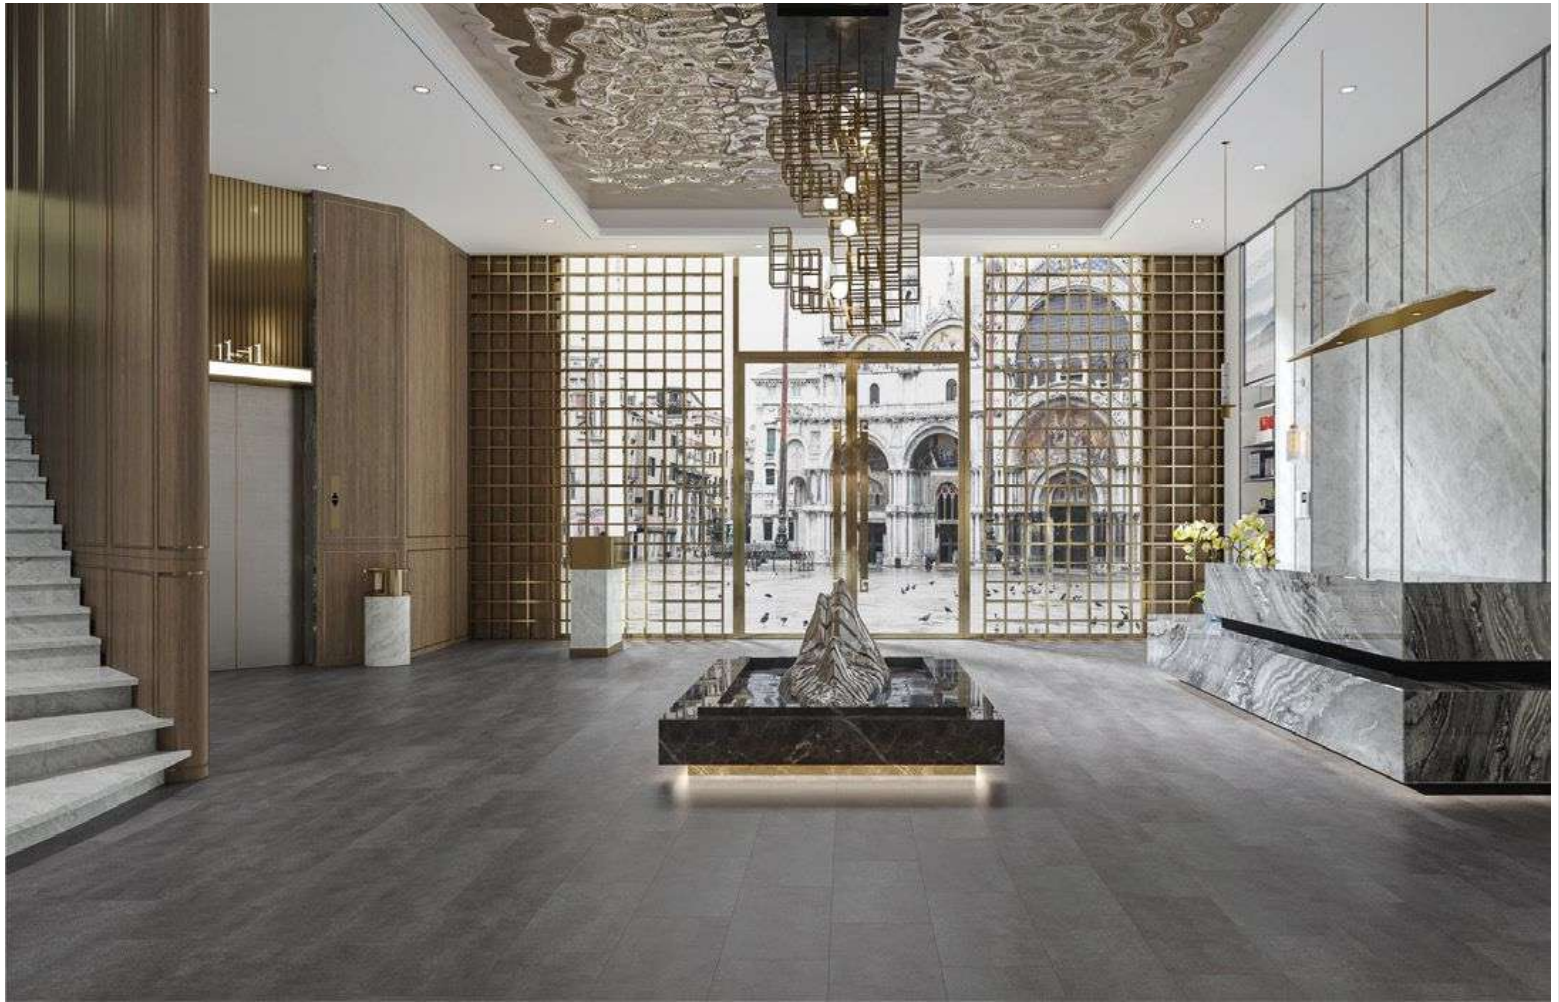

Concrete Oxford
91.4 x 45 x 3.3 cm
5.01 m² p/caja

LVT Floor Piso Vinilico



Forest Haya
17.78 x 121.92 x 3.5 cm
3.902 m² p/caja

LVT Floor Piso Vinilico



Forest Nogal
17.78 x 121.92 x 3.5 cm
3.902 m² p/caja

ADHESIVES

Adhesivos Especializados Alfombra y Pisos Vinilicos



HENRY 650R Releasable Pressure Sensitive Adhesive

*Adhesivo Sensible tipo "Post-It" para pegar
Alfombras y Pisos de Vinil Modulares y Flexibles.*

CUBETA 4 Gal.
Rinde 111m²

1 Galon
Rinde 27m²

Delivers a truly releasable bond in the upward peel direction, while at the same time providing heavy commercial traffic-rated bonding strength in the lateral shear direction

99% RH moisture resistant*

Ideal for frequently renovated commercial and residential spaces

— TECHNICAL DATA HENRY® 650 R

Use for:

When the specific guidelines for installation from the flooring manufacturer allow for a releasable adhesive use HENRY® 650 R to install the following types of flooring:

- Vinyl-backed carpet tile
- Vinyl cushion-backed carpet tile
- Fleece-backed carpet tile
- Bituminous-backed carpet tile
- Fiberglass encapsulated (cushion-backed) sheet vinyl
- Designated carpet cushions (cushion-to-substrate only)
- LVT (luxury vinyl tile & plank)
- Heterogeneous sheet vinyl

Short-nap roller 3/16" – 3/8":

300 sq. ft. per 1 gal. (1,200 sq. ft. per 4 gal. pail) – 27.8 sq. m per 3.78 L. (111.4 sq. m per 15.14 L pail)

U-notch 1/32" D x 1/16" W x 1/32" A:

300 sq. ft. / 1 gallon (1,200 sq. ft. per 4 gal. pail) – 27.8 sq. m / 3.78 L. (111.4 sq. m per 15.14 L pail)

Square-notch 1/16" D x 1/16" W x 1/16" A:

125 – 150 sq. ft. per 1 gal. (500 – 600 sq. ft. per 4 gal. pail) – 11.6 – 13.9 sq. m per 3.78 L (46.4 – 55.7 sq. m per 15.14 L pail)



GREENLINE
ENVIRONMENTAL TECHNOLOGY



HENRY 256 Installer Grade Dual Purpose Adhesive Carpet & LVT

CUBETA 4 Gal.
Rinde 52m²

Adhesivo para pegar Alfombras y Pisos de Vinil Flexibles

— INFORMATION HENRY® 256

HENRY® 256 is an installer grade dual purpose adhesive that is excellent for light to moderate traffic areas.

Key Features

- Aggressive early grab
- Short open time
- Ample working time
- Moisture and alkali resistant
- Antimicrobial product protection
- Easy to use, easy to trowel



GREENLINE
ENVIRONMENTAL TECHNOLOGY





Pisos ■ Baños ■ Home Decor

**Laminate Wood
Carpet Tile &
Vinyl Tile**
Catalog